

EliteScreen

ES05



SUNESSE[®]
Sunscreen Finesse

By HanDe

Product Certificate


Fire, Smoke Classification	B2(CN) - GB17591	FR(US) - NFPA701 TM#1
Health & Safety	Oeko-tex Standard 100 class IV	Greenguard® Gold
	RoHS - lead Free	EN71 Part 3:1994
	AATCC 12-2014	GB18586 - 2001
Colour fastness to light	Grade 8 ISO105 B02:2014	
	≥4.0 AATCC TM 16.3-2014; Option 3; Xenon Arc Lamp	
Warranty	5 Years	




Technical Data

STYLE		ES05
Composition		28% Polyester + 72% PVC
Openness Factor		≈5%
UV Screen		Up to 95%
Width	inch	98"-118"
	cm	250-300
Weight	oz/yd ²	10.62 ± 5%
	(ISO 2286-2) g/m ²	360 ± 5%
Thickness	inch	0.019 ± 5%
	(ISO 2286-3) mm	0.49 ± 5%
Mechanical Resistance		
Breaking	Warp	≥1080 N/5cm
	(ISO 13934-1) Weft	≥770 N/5cm
Tear	Warp	≥50 N
	(ISO 4674) Weft	≥28 N
Packing		32.8 yards
	(Roll Length)	30 Im


Colour

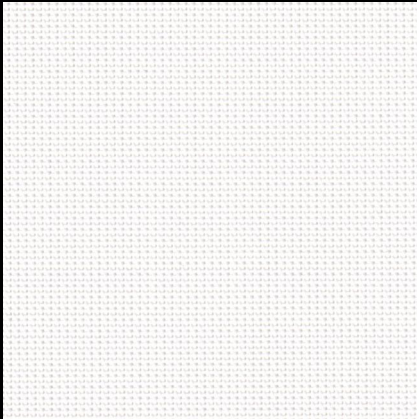


M01 White/White

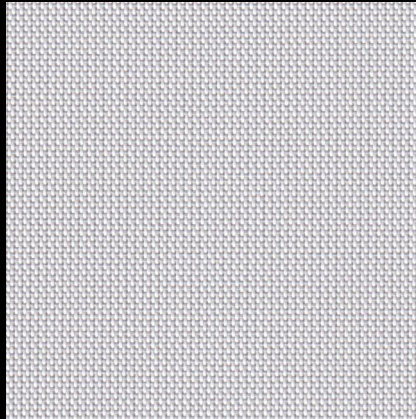


M03 White/Grey

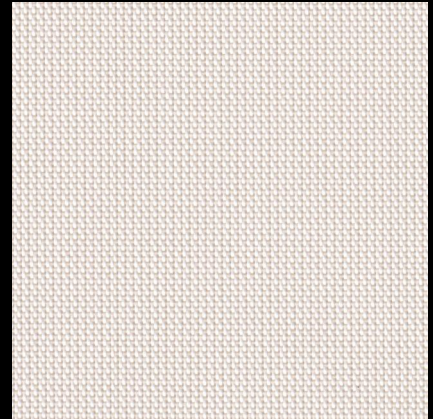


M16 White/Linen

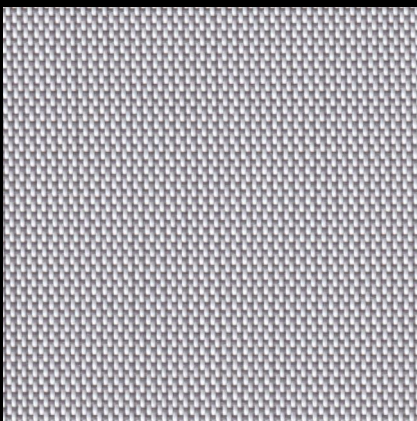


M17 White/Dark Grey

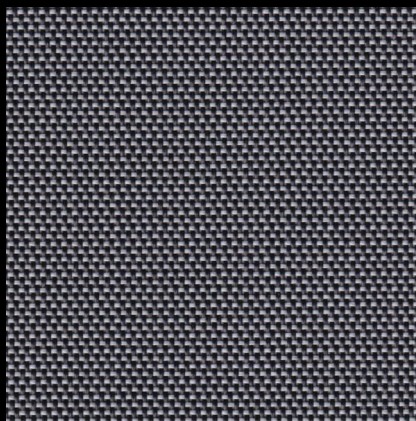


M74 Black/Grey

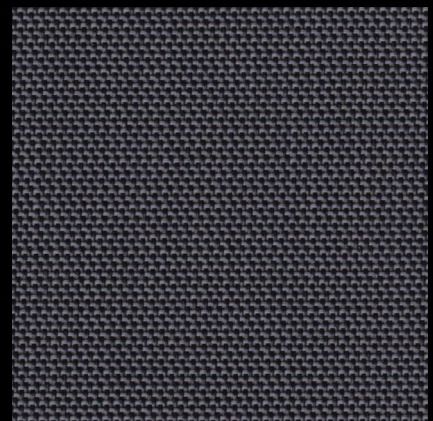

M22 Black/Dark Grey

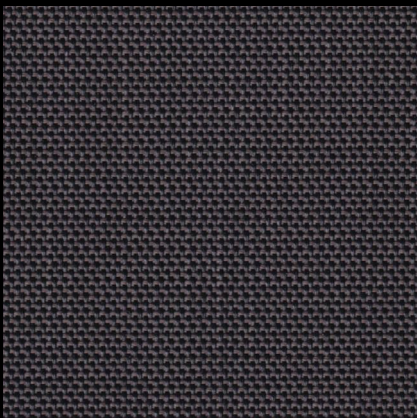

M75 Black/Brown

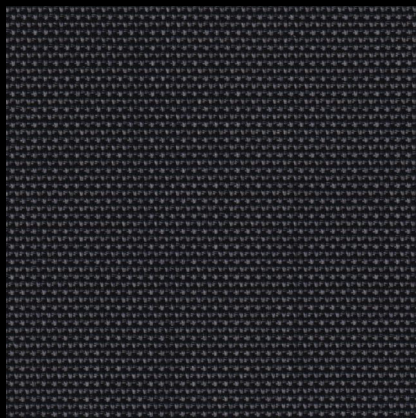

M18 Black/Black



HanDe®

Guangzhou Hande New Materials Co.,Ltd

Add: No.161, Yao TianHe Street,Yong shun Avenue,Yonghe Economic Zone,
GZ Economic&Technological Development District, Guang zhou, China

Tel: 86-20-32226319 Fax: 86-20-32222205 PostCode: 511356

Email: info@handegroup.com.cn

Web: www.handegroup.com.cn